

185W Single Output Switching Power Supply



Features :

- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- High efficiency up to 94%
- · Protections: Short circuit / Over current / Over voltage / Over temperature

HLG-185H series

- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- · Compliance to worldwide safety regulations for lighting
- · Suitable for dry / damp / wet locations
- 5 years warranty (Note.9)

| 袋 |
|---------------------------|
| TAIWAN EXCELLENCE 2011 |

HLG-185H-12 A Blank : IP67 rated. Cable for I/O connection.


- A : IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B : IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or potentiometer.
- D (option) : IP67 rated. Timer dimming function, contact MEAN WELL for details.

SPECIFICATION


| MODEL | | | HLG-185H-12 | HLG-185H-15 | HLG-185H-20 | HLG-185H-24 | HLG-185H-30 | HLG-185H-36 | HLG-185H-42 | HLG-185H-48 | HLG-185H-54 | | |
|-------------|---|-------------------|---|--------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--|--|
| DC VOLTAGE | | | 12V | 15V | 20V | 24V | 30V | 36V | 42V | 48V | 54V | | |
| | RATED CURRENT | | 13A | 11.5A | 9.3A | 7.8A | 6.2A | 5.2A | 4.4A | 3.9A | 3.45A | | |
| - | RATED POWER | | 156W | 172.5W | 186W | 187.2W | 186W | 187.2W | 184.8W | 187.2W | 186.3W | | |
| | RIPPLE & NOISE (max.) Note.2 | | | 150mVp-p | 150mVp-p | 150mVp-p | 200mVp-p | 200mVp-p | 200mVp-p | 200mVp-p | 200mVp-p | | |
| | VOLTAGE ADJ. RANGE Note.5 | | | | 17~22V | 22 ~ 27V | 27~33V | 33~40V | 38~46V | 43~53V | 49~58V | | |
| | CURRENT ADJ. RANGE | | Can be adjusted by internal potentiometer or through output cable | | | | | | | | | | |
| OUTPUT | | | 6.5~13A | 5.75 ~ 11.5A | | 3.9 ~ 7.8A | 3.1~6.2A | 2.6~5.2A | 2.2~4.4A | 1.95 ~ 3.9A | 1.72 ~ 3.45 | | |
| | | | | ±2.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | | |
| | LINE REGULATION | | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | | |
| | LOAD REGULATION | | ±2.0% | ±1.5% | ±1.0% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | | |
| | | | 2500ms, 80ms at full load 230VAC / 115VAC ; B type 2500ms, 200ms at 95% load 230VAC / 115VAC | | | | | | | | | | |
| | HOLD UP TIME (Typ.) | | 16ms at full load 230VAC / 115VAC | | | | | | | | | | |
| | VOLTAGE RANGE | | 90 ~ 305VAC 127 ~ 431VDC | | | | | | | | | | |
| | | | 90 ~ 305 VAC 127 ~ 431 VDC 47 ~ 63Hz | | | | | | | | | | |
| | FREQUENCY RANGE | | PF>0.98/115VAC, PF>0.95/230VAC, PF>0.92/277VAC at full load (Please refer to "Power Factor Characteristic" curve) | | | | | | | | | | |
| | POWER FACTOR (Typ.) EFFICIENCY (Typ.) | | 91.5% | 92% | 93% | 93.5% | 93.5% | 93.5% | 94% | 94% | 94% | | |
| INPUT | AC CURRENT | .) 12V | 1.8A / 115VA0 | | | 7A / 277VAC | 50.070 | 33.370 | 5470 | 0470 | 0470 | | |
| | (Typ.) | 12 V 15V ~ 54V | | | | | | | | | | | |
| | INRUSH CURREN | | 2.1A / 115VAC 0.9A / 230VAC 0.8A / 277VAC | | | | | | | | | | |
| | LEAKAGE CURRE | | COLD START 75A/230VAC | | | | | | | | | | |
| | LEARAGE CURRENT | | <0.75mA/277VAC | | | | | | | | | | |
| | | | 95 ~ 108% | | | | | | | | | | |
| | | | Protection type : Constant current limiting, recovers automatically after fault condition is removed Constant current limiting, recovers automatically after fault condition is removed | | | | | | | | | | |
| PROTECTION | SHORT CIRCUIT | | 14 ~ 17V | 18 ~ 21V | | - | 34 ~ 38V | | 47 ~ 53V | 54~60V | 50 . CEV | | |
| | OVER VOLTAGE | | | | 23 ~ 27V | 28~34V | | 41~46V | 47~530 | 54~000 | 59 ~ 65V | | |
| | | | Protection type : Shut down o/p voltage with auto-recovery or re-power on to recovery | | | | | | | | | | |
| | OVER TEMPERATURE | | 100°C ±10°C (RTH2) Protection type : Shut down o/o voltage, recovers automatically after temperature goes down | | | | | | | | | | |
| | | | Protection type : Shut down o/p voltage, recovers automatically after temperature goes down | | | | | | | | | | |
| | WORKING TEMP. | | -40 ~ +70°C (Refer to "Derating Curve") 20 ~ 95% RH non-condensing | | | | | | | | | | |
| | WORKING HUMID | | | | | | | | | | | | |
| ENVIRONMENT | | | -40 ~ +80 °C , 10 ~ 95% RH | | | | | | | | | | |
| | TEMP. COEFFICIE | NT | ±0.03%/°C (0~50°C) | | | | | | | | | | |
| | VIBRATION | | 10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes | | | | | | | | | | |
| | SAFETY STANDARDS Note.6 WITHSTAND VOLTAGE | | UL8750, CSA C22.2 No. 250.0-08, EN61347-1, EN61347-2-13 independent IP65 or IP67, J61347-1, J61347-2-13 approved ; | | | | | | | | | | |
| | | | design refer to UL60950-1, TUV EN60950-1 | | | | | | | | | | |
| SAFETY & | | | I/P-O/P:3.75KVAC I/P-FG:1.88KVAC O/P-FG:0.5KVAC | | | | | | | | | | |
| EMC | ISOLATION RESISTANCE | | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH | | | | | | | | | | |
| | EMC EMISSION | | Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≧50% load) ; EN61000-3-3 | | | | | | | | | | |
| | EMC IMMUNITY | | Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria A | | | | | | | | | | |
| | MTBF | | 192.2Khrs min. MIL-HDBK-217F (25°C) | | | | | | | | | | |
| OTHERS | DIMENSION | | 228*68*38.8mm (L*W*H) | | | | | | | | | | |
| | PACKING | | 1.15Kg; 12pcs/14.8Kg/0.74CUFT | | | | | | | | | | |
| NOTE | All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. Tolerance : includes set up tolerance, line regulation and load regulation. Derating may be needed under low input voltages. Please check the static characteristics for more details. Type A only. Safety and EMC design refer to EN60598-1, CNS15233, GB7000.1, FCC part18. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. Refer to warranty statement. | | | | | | | | | | | | |



HLG-185H series

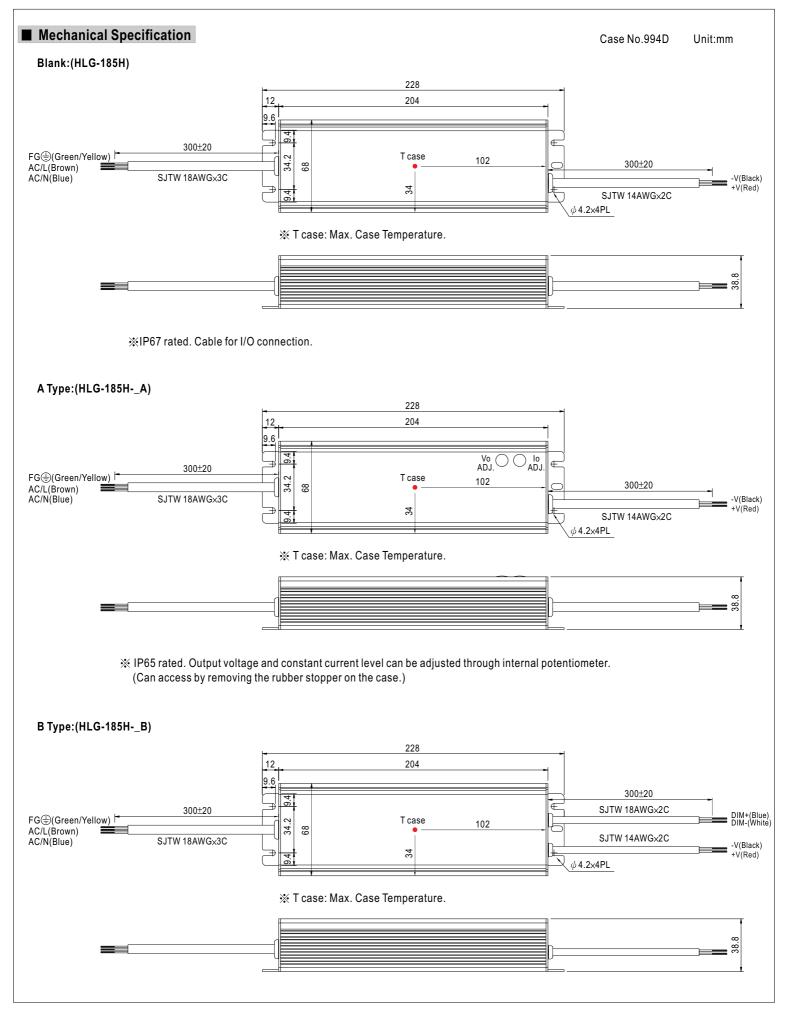




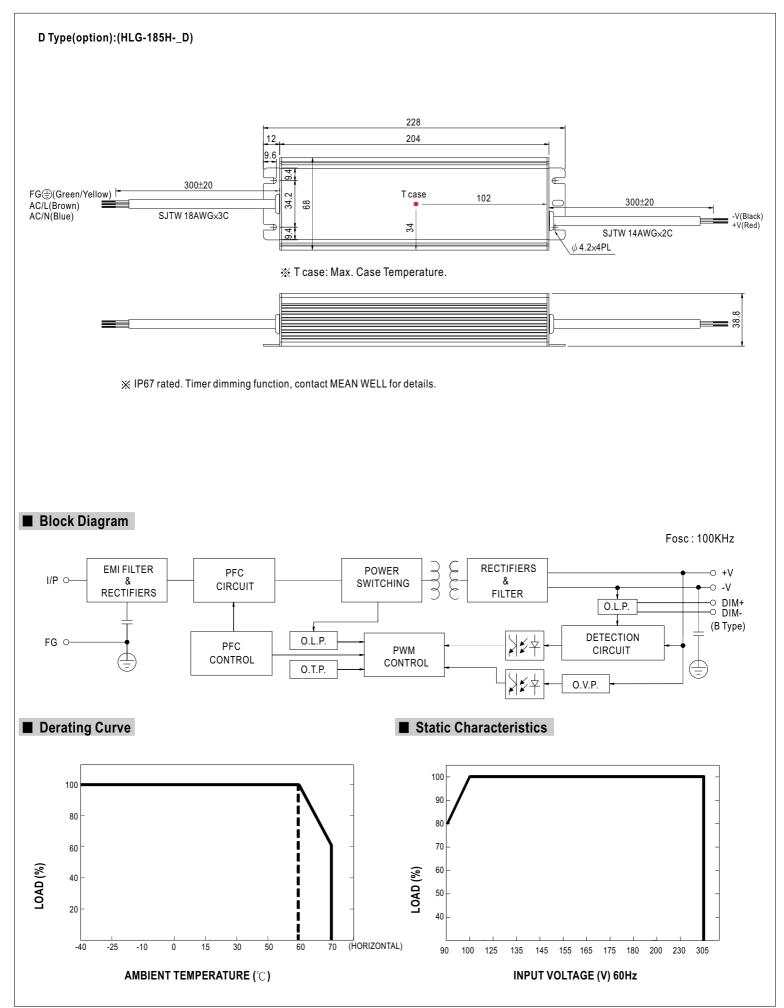




Power Factor Characteristic

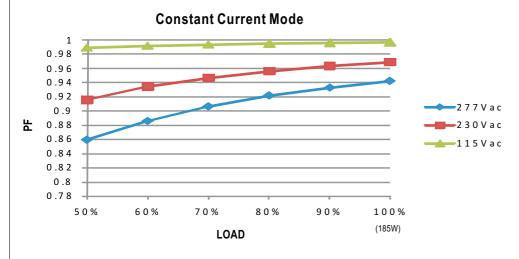

EFFICIENCY vs LOAD (48V Model)


HLG-185H series possess superior working efficiency that up to 94% can be reached in field applications.

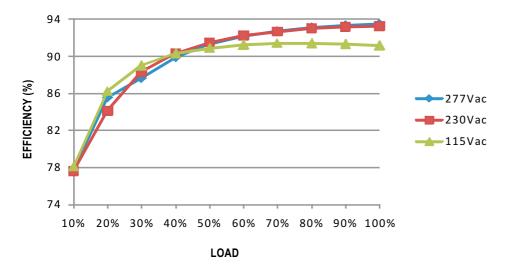

DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".


A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs. Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

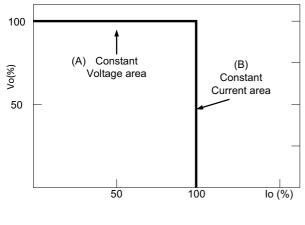

Typical LED power supply I-V curve



■ DIMMING OPERATION

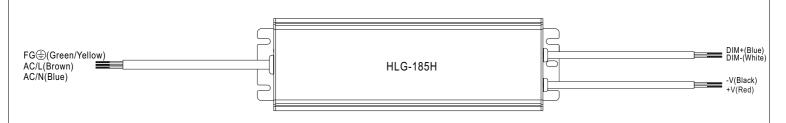

※ Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.

※ Please DO NOT connect "DIM-" to "-V".

 \times Reference resistance value for output current adjustment (Typical)


| 10K Ω | 20Κ Ω | 30Κ Ω | 40K Ω | 50Κ Ω | 60K Ω | 70Κ Ω | 80K Ω | 90Κ Ω | 100K Ω | OPEN | |
|---|-------------------------------|--|--|---|--|---|--|---|--|--|--|
| 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 102%~108% | |
| × 1 ~ 10V dimming function for output current adjustment (Typical) | | | | | | | | | | | |
| 1V | 2V | 3V | 4V | 5V | 6V | 7V | 8V | 9V | 10V | OPEN | |
| 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 102%~108% | |
| × 10V PWM signal for output current adjustment (Typical): Frequency range :100Hz ~ 3KHz | | | | | | | | | | | |
| | 10% output cu 1V 10% | 10% 20% output current adj 1V 2V 10% 20% 20% | 10% 20% 30% output current adjustment 1V 2V 3V 10% 20% 30% 30% | 10% 20% 30% 40% output current adjustment (Typical) 1V 2V 3V 4V 10% 20% 30% 40% 40% | 10% 20% 30% 40% 50% output current adjustment (Typical) 1V 2V 3V 4V 5V 10% 20% 30% 40% 50% | 10% 20% 30% 40% 50% 60% output current adjustment (Typical) 1V 2V 3V 4V 5V 6V 10% 20% 30% 40% 50% 60% | 10% 20% 30% 40% 50% 60% 70% output current adjustment (Typical) 1V 2V 3V 4V 5V 6V 7V 10% 20% 30% 40% 50% 60% 70% | 10% 20% 30% 40% 50% 60% 70% 80% output current adjustment (Typical) 1V 2V 3V 4V 5V 6V 7V 8V 10% 20% 30% 40% 50% 60% 70% 80% | 10% 20% 30% 40% 50% 60% 70% 80% 90% output current adjustment (Typical) 1V 2V 3V 4V 5V 6V 7V 8V 9V 10% 20% 30% 40% 50% 60% 70% 80% 90% | 10% 20% 30% 40% 50% 60% 70% 80% 90% 100% output current adjustment (Typical) 1V 2V 3V 4V 5V 6V 7V 8V 9V 10V 10% 20% 30% 40% 50% 60% 70% 80% 90% 100% | |

| Duty value | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | OPEN |
|-----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-----------|
| Percentage of rated current | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 102%~108% |

XUsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

Dimming connection diagram for turning the lighting fixture ON/OFF :



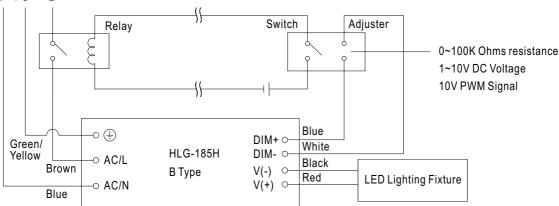


Using a switch and relay can turn ON/OFF the lighting fixture.

1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-. 2. The LED lighting fixture can be turned ON/OFF by the switch.



■ WATERPROOF CONNECTION



Waterproof connector can be assembled on the output cable of HLG-185H to operate in dry/wet/damp or outdoor environment.

