


GS 754B
CCD Forked Photoelectric Sensors

en 01-2011/09 50116503

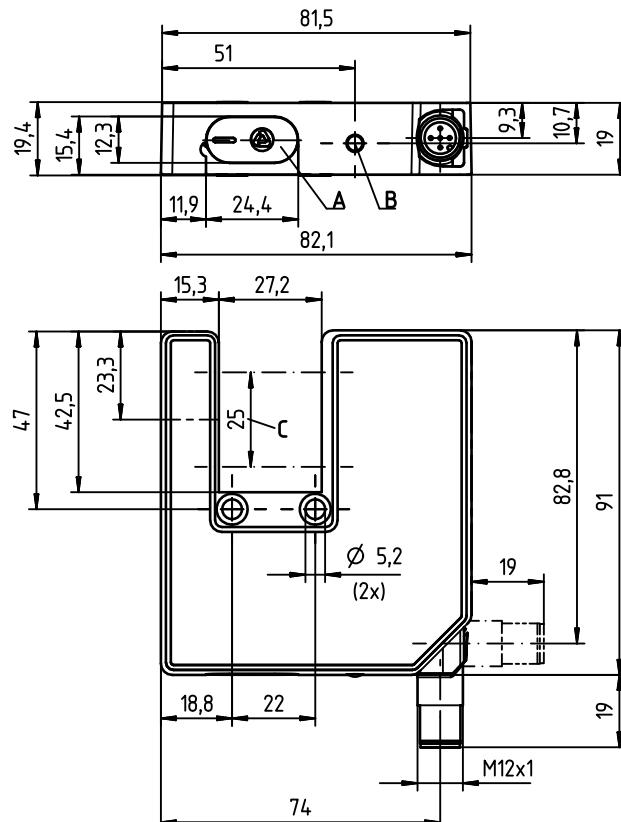

27 mm

- CCD line sensor with 25 mm measurement range
- Analog, digital or serial interface
- Configurable measurement range and measure mode
- Teach-in function
- Multiple object detection
- Configurable switching output
- Detection of transparent media
- Turning connector, can be turned by 90°



Accessories:

(available separately)

- M 12 connectors, (KD ...)
- Cable with M 12 connector (K-D...)
- Configuration cable for PC
(KB-ODS 96-1500, part. no. 500 82007)

Dimensioned drawing


- A** Interface
B Indicator diode
C Optical detection area

Electrical connection


Device variants	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5
RS 232	10...30VDC	I/O	GND	TxD	FE - functional earth
RS 422	10...30VDC	Tx-	GND	Tx+	FE - functional earth
Analog voltage	18...30VDC	I/O	GND	analog	FE - functional earth
Analog current	18...30VDC	I/O	GND	analog	FE - functional earth

Specifications

Optical data

Mouth width	27mm
Mouth depth	42mm
Measurement range	25mm
Resolution ¹⁾	a: 0.1mm (modes 1 ... 5) b: 0.014mm (mode 7) ± 0.03mm
Reproducibility	± 0.36mm
Linearity	0.5mm
Minimal object diameter	any (see remarks)
Object position	LED (modulated light)
Light source	
Wavelength	880nm

Timing

Response time	min. 2.5ms (output mode 7 + foil), min. 12ms (output mode 7)
Output cycle	0.012 ... 3.00s
Delay before start-up	≤ 300ms

Electrical data

Operating voltage U _B ²⁾	with RS 232/RS 422: 10 ... 30VDC (incl. residual ripple) with analog output: 18 ... 30VDC (incl. residual ripple)
Residual ripple	≤ 15 % of U _B
Open-circuit current	≤ 150mA

Output variants

Active/Not active	≥ 8V/≤ 2V or not connected
Activation/disable delay	≤ 1ms
Input resistance	approx. 6kΩ
Switching output current	pin 2: max. 100mA
Analog output current	(0)4 ... 20mA (depending on output mode), R _L ≤ 500Ω
Analog output voltage	(0)2 ... 10V (depending on output mode), R _L ≥ 2kΩ
Serial interface	RS 232/RS 422
Teach input	pin 2 reversible
Switching output	pin 2 reversible

Indicators

Green LED continuous light	ready
Green LED flashing	interference

Mechanical data

Housing	diecast zinc
Weight	270g
Optics cover	plastic (see remarks)
Connection type	M 12 connector, 5-pin

Environmental data

Ambient temp. (operation/storage)	-20°C ... +50°C/-30°C ... +70°C
Protective circuit ³⁾	1, 2, 3
VDE safety class	III
Protection class	IP 65
Standards applied	IEC 60947-5-2

- 1) System resolution, i.e. smallest practical value for the last position of the display
 2) Protective extra-low voltage (VDE 0100/T 410)
 3) 1=transient protection, 2=polarity reversal protection, 3=short circuit protection for all outputs

Tables

Diagram

Remarks

- **Approved purpose:**
This product may only be used by qualified personnel and must only be used for the approved purpose. This sensor is not a safety sensor and is not to be used for the protection of persons.
- Functional earth must be wired.
- Extraneous light sources must not beam into the receiver from the front.
- Objects ≤ 1 mm should be scanned in front of the receiver.
- Only fiber-free cloths may be used to clean optics covers. Tips and hard objects damage the optics.

Order guide

Selection table	GS 754B/D24-27-S12 Part No. 50115807	GS 754B/D3-27-S12 Part No. 50115806	GS 754B/N4-27-S12 Part No. 50115809	GS 754B/C4-27-S12 Part No. 50115803
Order code →				
Equipment ↓				
Output variants	RS 232	●		
	RS 422		●	
	analog voltage			●
	analog current			●
Pin 2, configurable	I/O	●	●	●