

185W Single Output Switching Power Supply

HLG-185 series

MIN HLG

8

- Features :
- Universal AC input / Full range · Built-in active PFC function
- High efficiency up to 94%
- · Protections: Short circuit / Over current / Over voltage / Over temperature
- · Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- · Suitable for LED lighting and street lighting applications
- · Compliance to worldwide safety regulations for lighting

🖤 selv 1P65 1P67 🕞 🖓 🕼 🖾 🖉 🕰 🕲 🖉 🖉 🖉 🖉 🖉

- · Suitable for dry / damp / wet locations
- 5 years warranty (Note.9)



110

<u>/M/</u>

HLG-185-12 A Blank : IP67 rated. Cable for I/O connection.

F/


- A : IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B : IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance.
- D (option) : IP67 rated. Timer dimming function, contact MEAN WELL for details.

SPECIFICATION


| MODEL | | HLG-185-12 | HLG-185-15 | HLG-185-20 | HLG-185-24 | HLG-185-30 | HLG-185-36 | HLG-185-42 | HLG-185-48 | HLG-185-54 | | | |
|-------------|---|------------|---|-------------------------|----------------|------------|------------|------------|------------|------------|-------------|--|--|
| | DC VOLTAGE | | 12V | 15V | 20V | 24V | 30V | 36V | 42V | 48V | 54V | | |
| OUTPUT | RATED CURRENT | | 13A | 11.5A | 9.3A | 7.8A | 6.2A | 5.2A | 4.4A | 3.9A | 3.45A | | |
| | RATED POWER | | 156W | 172.5W | 186W | 187.2W | 186W | 187.2W | 184.8W | 187.2W | 186.3W | | |
| | RIPPLE & NOISE (max.) Note.2 | | 150mVp-p | 150mVp-p | 150mVp-p | 150mVp-p | 200mVp-p | 200mVp-p | 200mVp-p | 200mVp-p | 200mVp-p | | |
| | VOLTAGE ADJ. RANGE Note.5 | | 10.8 ~ 13.5V | 13.5 ~ 17V | 17~22V | 22 ~ 27V | 27 ~ 33V | 33 ~ 40V | 38~46V | 43~53V | 49~58V | | |
| | CURRENT ADJ. RANGE | | Can be adjusted by internal potentiometer or through output cable | | | | | | | | | | |
| | | | 6.5~13A | 5.75 ~ 11.5A | 4.65 ~ 9.3A | 3.9 ~ 7.8A | 3.1~6.2A | 2.6~5.2A | 2.2~4.4A | 1.95~3.9A | 1.72 ~ 3.45 | | |
| | VOLTAGE TOLERANCE Note.3 | | ±2.5% | ±2.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | ±1.0% | | |
| | LINE REGULATIO | N | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | | |
| | LOAD REGULATION | | ±2.0% | ±1.5% | ±1.0% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | ±0.5% | | |
| | SETUP, RISE TIME Note.7 | | 2500ms, 80ms at full load 230VAC / 115VAC ; B type 2500ms, 200ms at 95% load 230VAC / 115VAC | | | | | | | | | | |
| | HOLD UP TIME (Typ.) | | 16ms at full load 230VAC / 115VAC | | | | | | | | | | |
| | | | 90 ~ 264VAC 127 ~ 370VDC | | | | | | | | | | |
| INPUT | FREQUENCY RANGE | | 47~63Hz | | | | | | | | | | |
| | POWER FACTOR | (Typ.) | PF>0.98/115VAC, PF>0.95/230VAC (Please refer to "Power Factor Characteristic" curve) | | | | | | | | | | |
| | EFFICIENCY (Typ.) | | 92% | 93% | 93.5% | 94% | 94% | 94% | 94% | 94% | 94% | | |
| | AC CURRENT | 12V | 1.8A / 115VA | C 0.8A/2 | 30VAC | | | | | | | | |
| | (Typ.) | 15V ~ 54V | 2.1A / 115VA | 2.1A/115VAC 0.9A/230VAC | | | | | | | | | |
| | INRUSH CURRENT (Typ.) | | COLD START 75A/230VAC | | | | | | | | | | |
| | LEAKAGE CURRENT | | <0.75mA/240VAC | | | | | | | | | | |
| PROTECTION | OVER CURRENT | | 95~108% | | | | | | | | | | |
| | | | Protection type : Constant current limiting, recovers automatically after fault condition is removed | | | | | | | | | | |
| | SHORT CIRCUIT | | | | covers automat | | | | o romovou | | | | |
| | OVER VOLTAGE | | 14~17V | - | 23~27V | 28~34V | 34 ~ 38V | 41~46V | 47 ~ 53V | 54 ~ 60V | 59~65V | | |
| | | | Protection type : Shut down o/p voltage with auto-recovery or re-power on to recovery | | | | | | | | | | |
| | | | 100°C ±10°C (RTH2) | | | | | | | | | | |
| | OVER TEMPERATURE | | Protection type : Shut down o/p voltage, recovers automatically after temperature goes down | | | | | | | | | | |
| | WORKING TEMP. | | -40 ~ +70°C (Refer to "Derating Curve") | | | | | | | | | | |
| | WORKING HUMIDITY | | 20 ~ 95% RH non-condensing | | | | | | | | | | |
| ENVIRONMENT | | | -40 ~ +80°C, 10 ~ 95% RH | | | | | | | | | | |
| | STORAGE TEMP., HUMIDITY | | ±0.03%/°C (0~50°C) | | | | | | | | | | |
| | TEMP. COEFFICIENT | | | | | | | | | | | | |
| | VIBRATION | | 10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes UL8750, CSA C22.2 No. 250.0-08, EN61347-1, EN61347-2-13 independent IP65 or IP67, J61347-1, J61347-2-13 approved ; | | | | | | | | | | |
| | SAFETY STANDARDS Note.6 | | design refer to UL60950-1, TUV EN60950-1 | | | | | | | | | | |
| | | | U/P-O/P:3.75KVAC I/P-FG:1.88KVAC O/P-FG:0.5KVAC | | | | | | | | | | |
| SAFETY & | WITHSTAND VOLTAGE | | | | | | | | | | | | |
| EMC | ISOLATION RESISTANCE | | I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH | | | | | | | | | | |
| | EMC EMISSION | | Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≥50% load) ; EN61000-3-3 | | | | | | | | | | |
| | EMC IMMUNITY | | Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria A 192.2Khrs min. MIL-HDBK-217F (25°C) | | | | | | | | | | |
| OTHERS | MTBF | | | | K-217F (25°C) | | | | | | | | |
| | DIMENSION | | 228*68*38.8n | · / | | | | | | | | | |
| | PACKING | NOT | 1.15Kg; 12pcs/14.8Kg/0.74CUFT | | | | | | | | | | |
| NOTE | All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25[°]C of ambient temperature. Ripple & noise are measured at 20MHz of bandwidth by using a 12[°] twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. Tolerance : includes set up tolerance, line regulation and load regulation. Derating may be needed under low input voltages. Please check the static characteristics for more details. Type A only. Safety and EMC design refer to EN60598-1, CNS15233, GB7000.1, FCC part18. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. Refer to warranty statement. | | | | | | | | | | | | |



HLG-185 series

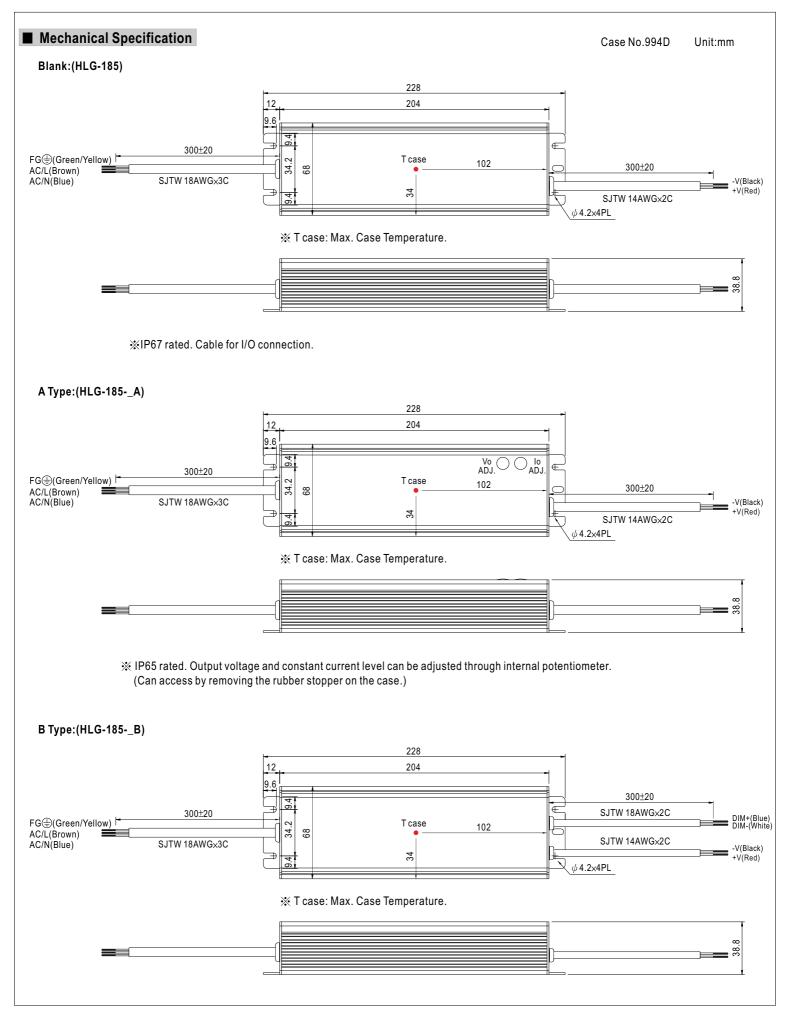




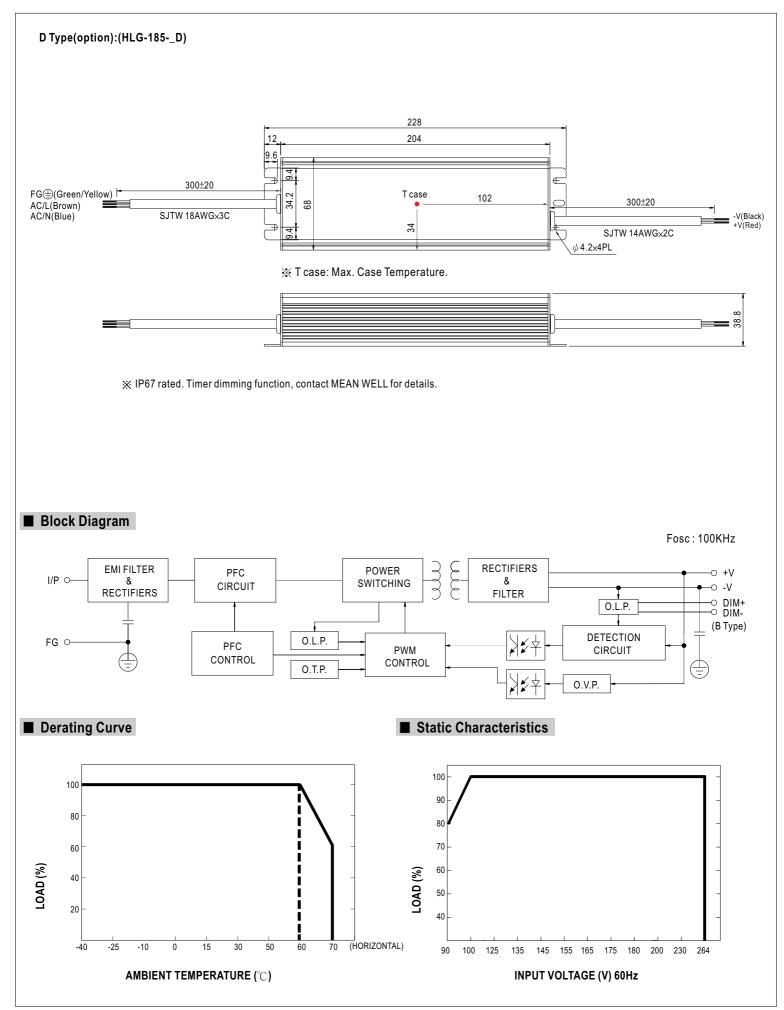




Power Factor Characteristic

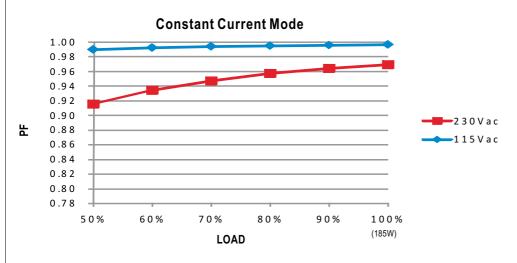

■ EFFICIENCY vs LOAD (48V Model)


HLG-185 series possess superior working efficiency that up to 94% can be reached in field applications.

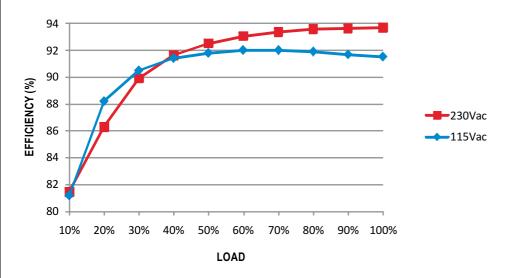

DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".


A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs. Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

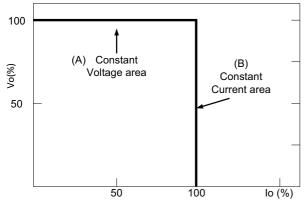

Typical LED power supply I-V curve



■ DIMMING OPERATION

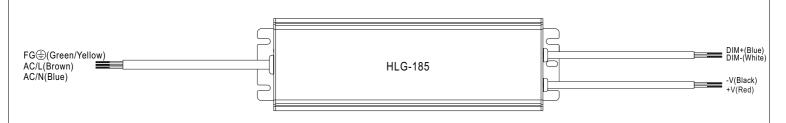

※ Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.

※ Please DO NOT connect "DIM-" to "-V".

 \times Reference resistance value for output current adjustment (Typical)


| Resistance value | 10K Ω | 20Κ Ω | 30Κ Ω | 40K Ω | 50Κ Ω | 60Κ Ω | 70Κ Ω | 80K Ω | 90Κ Ω | 100K Ω | OPEN |
|---|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|-----------|
| Percentage of rated current | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 102%~108% |
| × 1 ~ 10V dimming function for output current adjustment (Typical) | | | | | | | | | | | |
| Dimming value | 1V | 2V | 3V | 4V | 5V | 6V | 7V | 8V | 9V | 10V | OPEN |
| Percentage of rated current | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 102%~108% |
| ※ 10V PWM signal for output current adjustment (Typical): Frequency range :100Hz ~ 3KHz | | | | | | | | | | | |

| Duty value | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | OPEN |
|-----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|------|-----------|
| Percentage of rated current | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80% | 90% | 100% | 102%~108% |

XUsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

Dimming connection diagram for turning the lighting fixture ON/OFF :



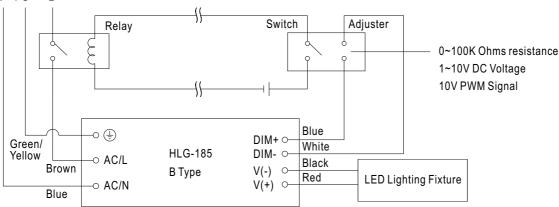

Using a switch and relay can turn ON/OFF the lighting fixture.

1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-. 2. The LED lighting fixture can be turned ON/OFF by the switch.



HLG-185 series

■ WATERPROOF CONNECTION

O Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-185 to operate in dry/wet/damp or outdoor environment.

